


Rigid Box Making Plant



Rigid Box Making Machine

with Automatic Visual Positioning & Robotic ARM

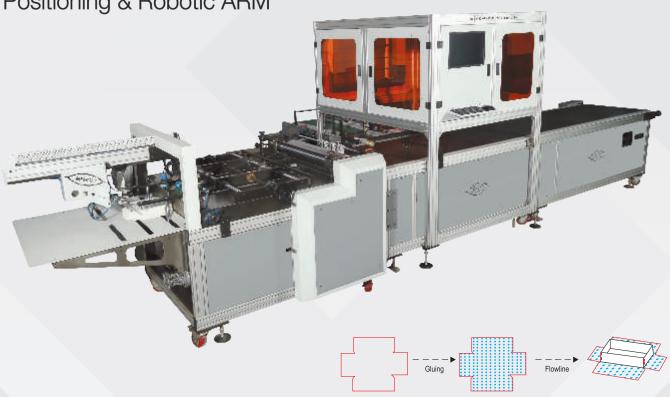

Memory Rigid Box Making Machine is suitable to make all kinds of Rigid Boxes, i.e Jewellery Boxes, Mobile phone Boxes, Sweet Boxes, Gift Boxes, Cosmetic Boxes, Watch Boxes & special Rigid Boxes for electronics etc.

Salient Features:

- The automatic paper feeder & specially designed glue system for top side gluing suitable to use hot melt & cold glue.
- Glue agitator for even mixing of hot melt glue & Cylinderically grinded Stainless Steel gluing rollers ensures even glue application on all types of cover matrial.
- Sturdy Aluminium profile structure with suction hold under the conveyor belt, keep the paper from deviating.
- Visual positioning system with the help of Robotic Arm & Box feeding conveyor ensures placement of the box on glued paper accurately.
- PLC based control panel with touch screen ensures ease of operation for operator.

| Technical Specifications | Model 635 A |
|--------------------------|-----------------------------|
| Open Paper Size (Min) | 90 x 200 mm (W x L) |
| Open Paper Size (Max) | 600 x 800 mm (W x L) |
| Paper Thickness | 100 - 200 gsm |
| Grey Board Thickness | 1-3 mm |
| Positioning Accuracy | <0.5 mm |
| Camera | Single Camera (6 Megapixel) |
| Speed | Upto 20 Pcs / Min. |
| Conveyor Belt | 635 mm |
| Power | 13 KW / 380 Volts / 50 Hz |
| Air Pressure | 6 Bar (Compressed) |
| Dimensions (W x L x H) | 2600 x 6500 x 200 mm |





TFT SCREEN

ROBOTIC ARM



PLC TOUCH CONTROL PANEL



Memory Rigid Box Making Machine is suitable to make all kinds of Rigid Boxes, i.e Jewellery Boxes, Mobile phone Boxes, Sweet Boxes, Gift Boxes, Cosmetic Boxes, Watch Boxes & special Rigid Boxes for electronics etc. The machine is designed for short & medium run jobs.

Salient Features:

- Sturdy Aluminium profile structure with suction hold under the conveyor belt, keep the paper from deviating.
- Specially designed gluing system for top side gluing suitable for Hot melt & Cold glue application.
- Cylindrically grinded gluing roller ensures even glue application on all cover materials.

Optional:

- Silicon Rollers Pressing Station for sheet to sheet pasting jobs.
- Automatic Paper Feeder.

| Technical Specifications | |
|--------------------------|------------------------------|
| Paper Width (Min - Max) | 90 - 635 mm |
| Paper Length (Min - Max) | 200 - 800 mm |
| Paper Thickness | 90-300 gsm |
| Speed | 7 - 30 pcs / min |
| Power | 12.5 KW / 380 Volts / 50 Hz. |
| Dimensions (L x W x H) | 6500 x 1700 x 1100 mm |
| Net Weight | 700 kgs. |


Corner Tapping Machine TJ - 40

Salient Features:

The Machine is designed to paste corners of the boxes with thermal tape. The machine consists of :

- Advance Clutch System
- Thermostatically Controlled Heating Device.
- Foot Paddle operation for faster Production.

| Technical Specifications | Model TJ - 40 |
|--------------------------|----------------------------|
| Box Size Min. | 40 x 40 x 10 mm |
| Speed | 20-40 pcs/ min |
| Power | 0.5 kw / 220 Volts / 50 Hz |
| Dimensions | 800 x 500 x 1400 mm |
| Net Weight | 170 kgs |



Box Forming Machine

with Automatic Sizing



| Technical Specifications | 450 ZS |
|--------------------------|-------------------------|
| Max Box Size | 400 x 450 x 120 mm |
| Min Box Size | 60 x 90 x 12 mm |
| Max. Paper Size | 580 x 850 mm |
| Turn in depth | 10 – 70 mm |
| Card board thickness | 0.8 – 3 mm |
| Surface paper thickness | 100 - 200 gsm |
| Speed | Upto 22 Pcs. Box / Min |
| Power | 2.25 kw, 380 v, 3 phase |
| Air Supply | 10 L/ Min, 0.8 Mpa |
| Dimensions (L x W X H) | 1100 x 1000 x 2350 mm |
| Weight | 800 kg |

Note: Needs Compressed Air connection at the time of installation at

Salient Features:

- The Movements of main shaft mold stretch, wrapping, folding-in, and bubble pressing, which are all driven by double servo motors & cam boxes, guarantee a quiet and stable operation circumstance and smooth mechanical process.
- Besides the cam for pressing the contingent bubble, there are 4 cylinders for additional bubble pressing, solving the thicker paper issue and worse glue issue.
- Folding Corner Edge is up to 80 mm as standard, or it can be customized to 150 mm, and this is controlled by rails and cylinder, which is adjustable and precise.
- Vacuum fan to keep the box and the machine, and this tension can be adjusted according to the sizes of the boxes.
- PLC Control with Touch Screen interface (Schneider or Panasonic)
- Imported optical grating transducer protects the operator from operation injury.
- Computer control with error auto stop and display.
- Fold ears, wrap, insert and form the box automatically in one lot.
- With Air Tac cylinder and Taiwan Brand guide rail. Servo motor Panasonic.
- Quick mould change design, takes only 15 minutes to change to another box.
- Equipped with brush wheel for folding sides smoothly.
- Equipped with air pressure detector on the box inserter, the machine can't run if the box are not inserted or inserted wrongly.
- The bottom mould is pneumatic drive to prevent bubble generation.



An ISO 9001: 2008 Company



Memory Repro Systems (P) Limited

Regd. Office : D-28, DSIDC Packaging Complex, Kirti Nagar, New Delhi-110015

Telephone: +91-11-41420960 / 70 / 80 E-mail: sales@memoryrepro.com

Works Plot No. 7, Road No. 1A, Mundka Udyog Nagar, Rohtak Road,

Mundka, Delhi -110041



